

LUXPOWER® SERIES **N**5



570-590W Mono

144 Half-Cell Layout
M10/182mm N-TOPCon Cell



LECO N-TOPCon Cell Technolog



Half Cut Cell Technology



SMBB Technology



Excellent Anti-PID Low LID Performance




Less Hot Spot Shading Effects



Higher Power Output Lower BOS & LCOE

Linear performance Warranty

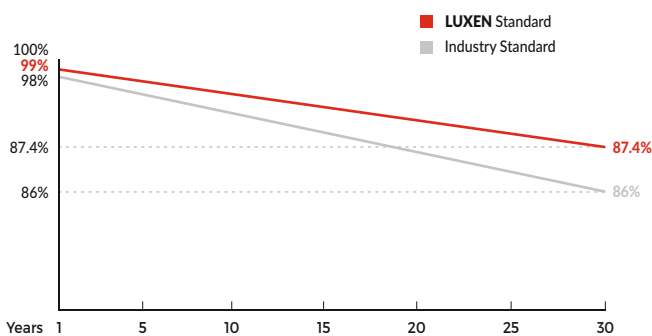

Comprehensive Certificates

- ISO9001:2015 QMS
- ISO14001:2015 EMS
- ISO45001:2018 OHSMS
- IEC61215/IEC61730 Standard Quality
- IEC61701/IEC62716 Salt/Mist/Ammonia Tests




LUXEN SOLAR ENERGY CO., LTD.

Operational HQ: Vienna Technology Center, Christine-Touaillon-Strasse 11/2.01, 1220 Vienna, Austria
Production HQ: No.1, Haiyue Road, Nantong, Jiangsu, 226000, China
europe@luxensolar.at

www.luxensolar.com

MECHANICAL CHARACTERISTICS

Solar Cells	N-type Mono
No. of Cells	144 (6x24)
Dimensions	2279 x 1134 x 35mm
Weight	27.5kg
Front Glass	3.2mm coated tempered glass
Frame	Anodized aluminium alloy
Junction Box	Ip68 rated (3 by pass diodes)
Output Cables	4.0mm ² 300mm (+) / 300mm (-) Length can be customized
Connectors	Mc4 compatible
Mechanical load test	5400Pa

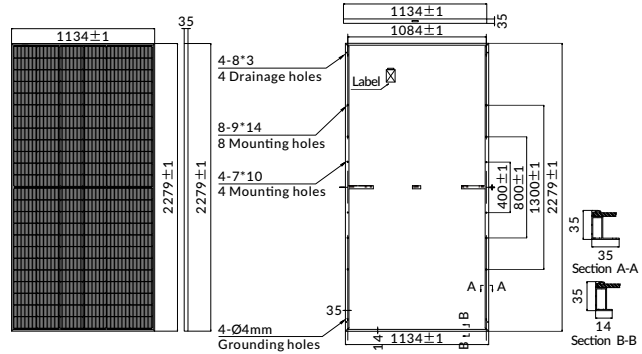

ELECTRICAL PARAMETERS

POWER CLASS	LNVU-570N		LNVU-575N		LNVU-580N		LNVU-585N		LNVU-590N	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum power (Pmax)	570W	429W	575W	433W	580W	437W	585W	441W	590W	445W
Open Circuit Voltage (Voc)	51.30V	48.78V	51.44V	48.96V	51.57V	49.14V	51.70V	49.31V	51.83V	49.49V
Short Circuit Current (Isc)	14.19A	11.45A	14.26A	11.51A	14.33A	11.57A	14.40A	11.63A	14.47A	11.69A
Voltage at Maximum power (Vmpp)	42.79V	39.61V	42.94V	39.76V	43.09V	39.91V	43.24V	40.05V	43.38V	40.20V
Current Maximum Power (Impp)	13.32A	10.83A	13.39A	10.89A	13.46A	10.95A	13.53A	11.01A	13.60A	11.07A
MODULE EFFICIENCY (%)	22.06%		22.25%		22.44%		22.64%		22.83%	



STC: Irradiance 1000W/m², cell temperature 25°C, AM1.5G NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s, AM1.5G

PACKING CONFIGURATION

Container	20'GP	40'HQ
Pieces per pallet	31	31
Pallets per container	5	20
Pieces per container	155	620

I-V CURVE

LNVU-580N/I-V

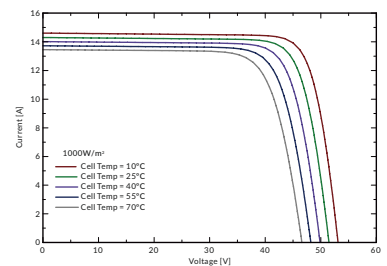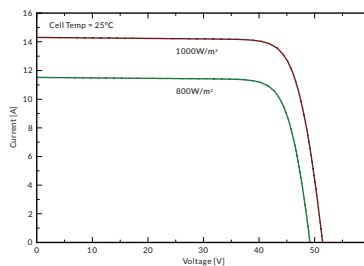

OPERATING CHARACTERISTICS

Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	25A
Power Tolerance	0/+5W

TEMPERATURE CHARACTERISTICS

Nominal Operating Temperature (NMOT)	45±2°C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	+0.045%/°C

Note: The specifications, data and technical characteristics provided in this data sheet are subject to changes due to continuous R&D, product innovation and improvement. LUXEN SOLAR reserves the right to modify the information any time without prior notice.